

experience has no substitute

Substitute

Continuous Miner CM2 Series






Eickhoff Bergbautechnik GmbH - the Mining Equipment Division -

Eickhoff Bergbautechnik GmbH, located in Bochum Germany, is a manufacturer of underground coal mining equipment for the global mining industry. The portfolio comprises a full range of shearer loaders for longwall mining operations as well as various versions of Continuous Miners for room and pillar mining operations.

Eickhoff Bergbautechnik GmbH is part of the Eickhoff Group of Companies. Besides being well placed in the mining business, the Eickhoff Group has also been recognized for its high quality industrial gearing products, wind turbine gearboxes and highly specialized cast steel products since 1864.

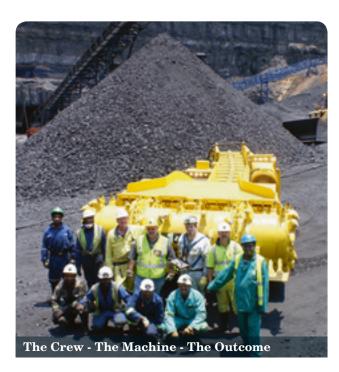

Eickhoff Continuous Miner CM2-Series

Eickhoff mining machinery is well known for its reliable and robust design. Based on more than a century of experience in manufacturing mining equipment, gear-boxes and steel castings, our Continuous Miners have proven their outstanding capabilities in some of the toughest conditions in coal mining.

The machine's concept has been steadily refined, in close cooperation with Eickhoff's customers, to meet the highest expectations in terms of safety, productivity and maintainability. Eickhoff Continuous Miners are designed for operation in challenging mining conditions and can be easily adapted to meet specific customers' requirements.


Customer Service

Eickhoff is present in all major coal mining regions around the globe. Its subsidiaries and dealerships are sales, service and distribution hubs close to the customers. This ensures quick spare parts delivery and therefore high machine availabilities. Eickhoff's dedicated and committed staff supports their customers whenever required.






Interchangeability of Components

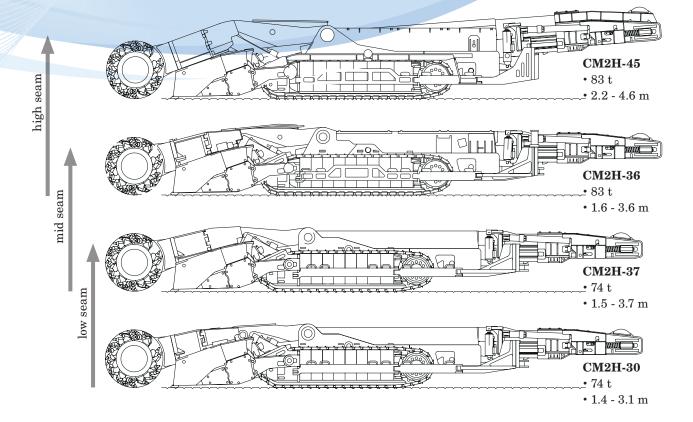

Interchangeability of Components

Four different types of Eickhoff Continuous Miners are available for cutting face heights from 1.4 m up to 4.6 m. All machine types share a large number of components that allow for interchangeability and optimized stock management. The variations

in design and structure mainly affect the cutter boom and the main frame which are adapted to different cutting conditions.

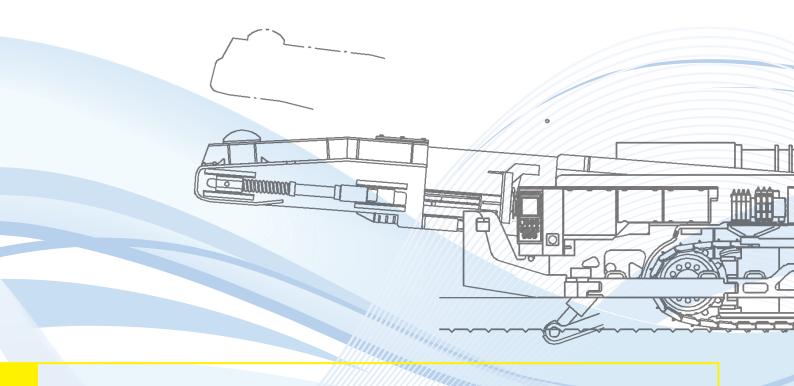

Cutter Gearboxes

The cutter gearbox concept is based on separate, but interconnected LH and RH units to deliver the full installed motor power to the cutting drums. The two units ensure simple and cost effective maintenance at the face. Either of the gearboxes can be changed independently should the need arise.

Cutter Drums

The optimum ratio between drum size and RPM ensures a slow bit tip speed, thus greatly keeping fines and dust levels down to a minimum.





Conveyor and CLAs


The combination of effective CLAs (Centrifugal Loading Arms) plus a wide foot-shaft-driven chain conveyor guarantees unrestricted sumping and shearing as well as short cycle times. Customers have the option of either a straight or kinked conveyor subject to whichever will best suit their transport equipment and mining conditions.

Traction System

The hydraulically powered Continuous Miners have a low ground pressure and combine high tramming speeds with maximum thrust. This sophisticated hydraulic traction system has significant advantages in wet and





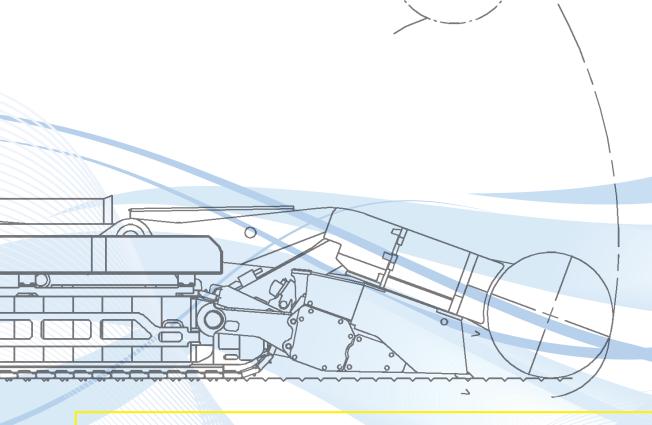

muddy floor conditions. It is highly valued by Eickhoff's customers because of its low life cycle costs, ease of maintainability and outstanding performance in difficult mining conditions such as steep inclines.

Hydraulic System

Proportional sumping and shearing is achieved by control loops monitoring the cutter motor currents occurring during the cutting cycle. Even though the traction motors are hydraulically driven, the entire hydraulic circuit only contains a mere 600 liters of hydraulic oil. The machines have the ability to continue tramming without cooling water for extended periods.

Remote Control and Drivers Cab


The light weight radio remote control is carried in front of the body using shoulder straps. The ergonomically designed buttons and levers enhance operator control of the machine and allow for long periods of operation without getting tired.

Depending on customers' requirements and/or national legislation for operator posititoning, the Continuous Miner can optionally be equipped with an onboard cabin protecting the driver's seat. In this case the radio remote control is connected via cable to the machine avoiding the need for additional stationary control panel. This additional feature is widely used in roadway development applications.








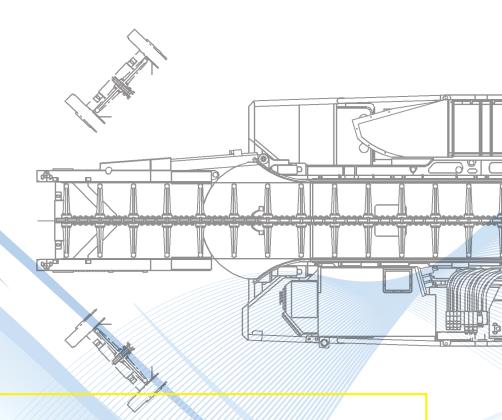

Scrubber, Methane System and PDS

Depending on customers' requirements, all major makes of dust scrubbers, methane detection systems and proximity detection systems can be fitted onto the Continuous Miners. Naturally such systems will comply to the relevant local safety regulations and standards.



Scrubber System

Electrical System


The unique electrical design concept makes a transformer unnecessary. All electrical components for machine operation and monitoring are placed in a single flame-proof enclosure in an elevated position, well above mud and water, with easy access for maintenance and trouble shooting.

An IPC and several microprocessor controlled motor protection devices reduce the number of electrical components to a minimum while increasing machine availability. Comprehensive data logging and transmission of relevant operational data to the surface give mine engineers the opportunity to optimize their production processes.

A color display is provided on the machine to show operational parameters and machine condition, assisting service and repair personnel with quick fault finding.





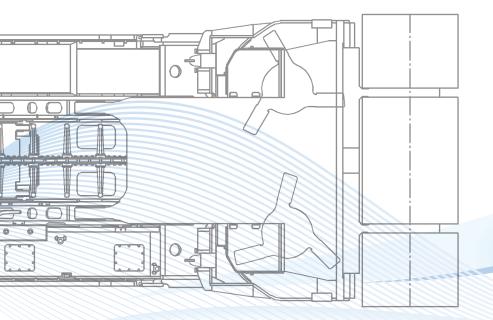

		CM2H-30	CM2H-37	CM2H-36	CM2H-45
Machine weight	tonnes	74		83	
Ground pressure	kPa	200			
Tramming speed	m/min	intermediate: 8, fast: up to 25			
Minimum tramming height	mm	1325	1430	1480	1650
Min. cutting height*	m	1.4	1.5	1.6	2.2
Cutting width	m	3.65			
Max. cutting height	m	3.1	3.7	3.6	4.6
Loading rate	t/min	30			
Drum diameter	m	1.2			
Drum speed	rpm	48			
Supply voltage	V	1000 / 1140			
Cutting power, electric drive, (S1 continuous rating)	kW	2x 180			
Spinner and conveyor power electric drive	kW	$2\mathrm{x}45$			
Hydraulic traction power	kW	2x 60		2x 75	
Pump power, electric drive	kW	125 / 140		160	
Scrubber power	kW	Hydraulic or electric scrubber motor with up to 45 kW			
Total installed power	kW	620 / 635 655		55	

 $^{^{\}ast}$ depending on undulation of the seam



Eickhoff Bergbautechnik GmbH

Am Eickhoffpark 1 44789 Bochum

GERMANY

Phone: +49 234 975-0 Fax: +49 234 975-2676 contact@eickhoff-bochum.de www.eickhoff-international.com

experience has no substitute

Subsidiaries

worldwide

000 Eickhoff Bel Soligorsk 000 Eickhoff Moscow 000 Eickhoff Sibir Kiseljovsk

Eickhoff Corporation Pittsburgh Eickhoff Eickhoff Polonia Ltd.

Bochum

Katowice

Bergbautechnik GmbH

Eickhoff Corporation

200 Park West Drive Pittsburgh, PA 15275 USA

Phone: +1 412 78 8 1400 Fax: +1 412 78 8 4100 sales@eickhoff.us www.eickhoffmining.com

Eickhoff Polonia Ltd.Sp.zo.o.

ul. Lwowska 38 40-389 Katowice POLAND

Phone: +48 32 2066011 Fax: +48 32 3558754 eickhoff_sekretariat@onet.pl

Eickhoff (Pty.) Ltd.

12 Strauss Crescent Wadeville, Ext. 6, 1422 Gauteng SOUTH AFRICA

Phone: +27 11 902-5630 Fax: +27 11 902-5830 sales@eickhoff.co.za www.eickhoff.co.za

OOO Eickhoff Moscow

Wolokolamskoje Chaussee 73 Office 207 125424 MOSCOW RUSSIA

Phone: +7 495 363 43 17 Fax: +7 495 363 43 17 eickhoff-moscow@mail.ru

000 Eickhoff Sibir

Gogolstr. 25 562700 Kiseljovsk Kemerovo Region RUSSIA

Phone: +7 38464 20131 Fax: +7 38464 20131 eickhoff@nvkz.net

Eickhoff Office Beijing

Room A403, Huixin Plaza, No. 8 Beichen East Road, Chaoyang District Beijing 100101 P.R. CHINA

Phone: +86 10 51662022 Fax: +86 10 51662021 eickhoff_bj@126.com

Eickhoff (Pty.) Ltd. Johannesburg

Eickhoff Australia PTY Ltd.
Sydney

Tianjin Eickhoff

Bergbautechnik Co. Ltd

Tianjin Eickhoff

Bergbautechnik Co. Ltd. No.19 Saida No.2 Avenue, Xiqing Economic Development Area, Tianjin 300385 P.R.China

Phone: +86 22-23962699 Fax: +86 22-23962698 eickhoff_liuxin@126.com

Eickhoff Australia PTY. Ltd.

41 Prince William Drive Seven Hills NSW 2147 AUSTRALIA

Phone: +61 2 9674-6733 Fax: +61 2 9674-6581 john.smallwood@eickhoff.com.au

IOOO EickhoffBel

St. Kali-1, Soligorsk County Minsk Region PO Box 81 223710 Soligorsk BELARUS

Phone: +375 174200889 Fax: +375 174200688 ms_eickhoffbel@hotmail.com